

Face Mount to Through-the-Post Mount

Cable Runs through Two Corners

When going around two corners, it's necessary to tension the cable from both ends as shown in Deck 4.


Use the 672 series

The tensioning devices are an Adjust-a-Body® with Hanger Bolt which lags into the wood post on one end, and a 1-1/2" long Receiver with Push-Lock® Stud on the other end.



Series 672 Kits

Cable Length	1/8" cable	3/16" cable
	PART NO.	PART NO.
30'	67230	67230-6
40'	67240	67240-6
50'	67250	67250-6
60'	67260	67260-6

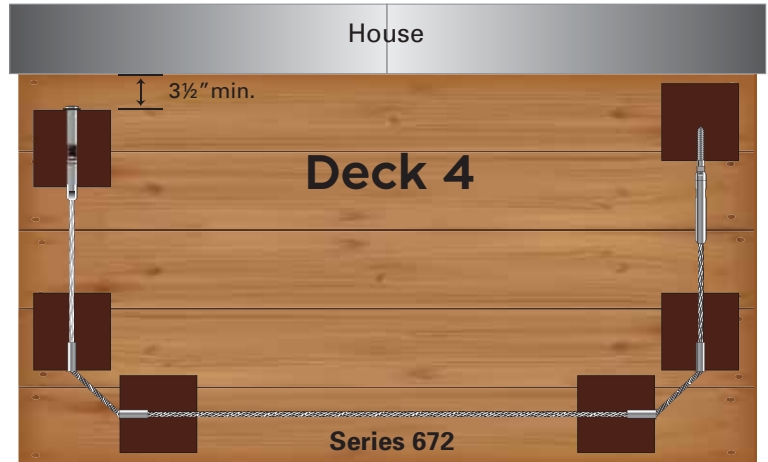

For Post Protector Tubes, see Tools and Essentials section.

Tools needed for 672 Series:

- 5/32 drill bit if 1/8" cable, 7/32 if 3/16"
- 29/64 drill bit for Receiver installation
- 3/16 hex wrench for tensioning Receiver
- Drill bit for lag installation: 7/32" for Common Redwood, 15/64" for Common Douglas Fir, 9/32" for Red Oak/Maple
- 1/4 wrench for turning Hanger Bolt
- 7/16 wrench to tension Adjust-a-Body®
- 3/8 wrench for Push-Lock® Stud
- Cable cutting tool
- If using Post Protector Tubes, 1/4 drill bit