

HARDWARE FOR CONCRETE POSTS

SWAGED TENSIONING FITTING


Adjust-A-Body® with Concrete Anchor Bolt



The Adjust-A-Body® with Concrete Anchor Bolt is an exposed, swaged, tensioning, face-of-the-surface-mounted fitting that is recommended for level runs terminating at a concrete surface only. This fitting is available for 1/8", 3/16", and 1/4" diameter 1x19 stainless steel cable.

The Adjust-A-Body® with Concrete Anchor Bolt can be used with any fitting on the opposite end of the run. A concrete anchor is driven into a pre-drilled hole in the concrete surface. The short thread of the anchor bolt portion of the fitting is threaded into the concrete anchor. The cable is retained within the body portion of the fitting by a ferrule swaged onto the end of the cable. The lock nut is installed all the way onto the exposed machine thread of the anchor bolt, followed by the body, which is secured onto the anchor bolt until effectively creating tension on the cable. Once sufficient tension is achieved, the lock nut is secured against the end of the body to prevent the fitting from loosening.

Use of this fitting requires that an appropriately sized **ferrule** is swaged onto the cable. Ferrule sold separately, see information on page 8. The Red Head® Concrete Anchor is available for purchase at many building supply retailers and distributors throughout the country.

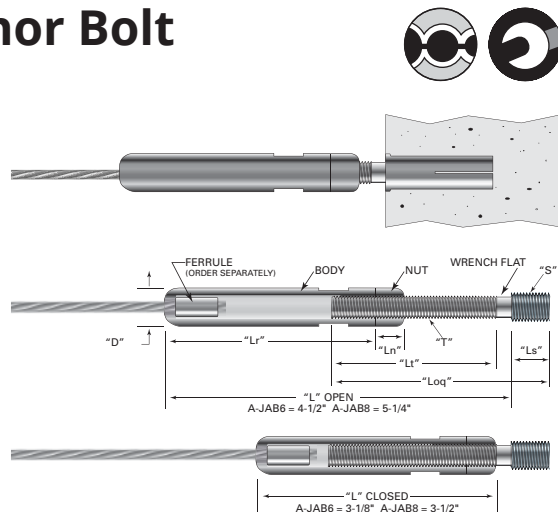

TYPE 316 STAINLESS STEEL

CABLE DIA.	PART NO.	USE WITH FERRULE NO.	"S"	"T" THREAD	"Ls"	"Lt"	"Loq"	"Ln"	"Lr"	"D"	USE WITH "RED HEAD" BRAND CONCRETE ANCHOR CARBON STEEL	STAINLESS
1/8"	A-JAB6	F-4	3/8-16	5/16-24 L.H.	.500"	2.313"	3.188"	.375"	2.75"	.490"	RM-38	SRM-38
3/16"	A-JAB6	F-6										
1/4"	A-JAB8	F-8	1/2-13	7/16-20 L.H.	1.125"	2.500"	3.938"	.500"	3.00"	.617"	RM-12	SRM-12