


Fixed Jaw and Threaded Tab

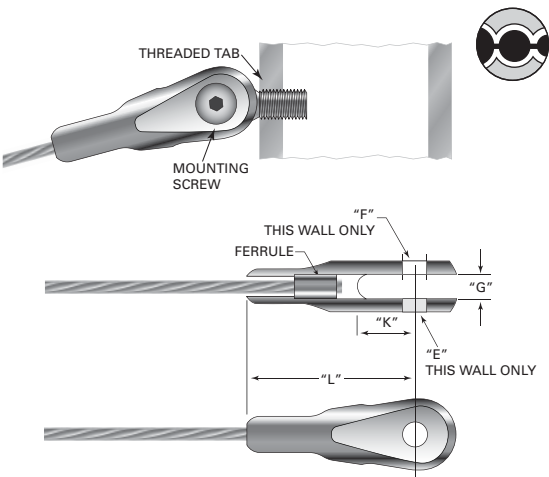

TYPE 316 STAINLESS STEEL

CABLE DIA.	PART NO.	USE WITH FERRULE NO.	USE WITH SCREW NO.	USE WITH TAB NO.	"E" THREAD	"F" DIA.	"G"	"K"	"L"
1/8"	F-J62	F-4	SC-6	TT-6B	1/4-28	.260"	.260"	.56"	1.75"
3/16"	F-J62	F-6	SC-6	TT-6B	1/4-28	.260"	.260"	.56"	1.75"
1/4"	F-J82	F-8	SC-8	TT-8B	3/8-24	.390"	.313"	.75"	2.12"
5/16"	F-J122	F-10	SC-8	TT-8B	3/8-24	.390"	.348"	.87"	2.25"
3/8"	F-J122	F-12	SC-8	TT-8B	3/8-24	.390"	.348"	.87"	2.25"


The Fixed Jaw is an exposed, swaged, non-tensioning, face-of-the-post-mounted fitting that is suitable for use on level or pitched runs and is available for 1/8", 3/16", 1/4", 5/16", and 3/8" diameter 1x19 stainless steel cable.

The Fixed Jaw can be used with any tensioning fitting on the opposite end of the run. This fitting attaches to the metal end post by installing a Threaded Tab into a pre-drilled and tapped hole in the end post and attaching the Fixed Jaw to the threaded **tab** with a button head **screw**. The cable is retained within the Fixed Jaw fitting by a ferrule swaged onto the end of the cable. Screw and threaded tab are sold separately (screw and threaded tab information on pages 9 and 22).

While this fitting can be used on pitched or level runs, it is most appropriate for pitched runs because the Fixed Jaw pivots at the tab. Use of this fitting requires an appropriately sized **ferrule** that is swaged onto the cable, which must also be purchased separately (ferrule information on page 8).

This fitting was designed to be compatible in appearance to the Adjust-A-Jaw® tensioning fitting.

Fixed Jaw with Lag Eye

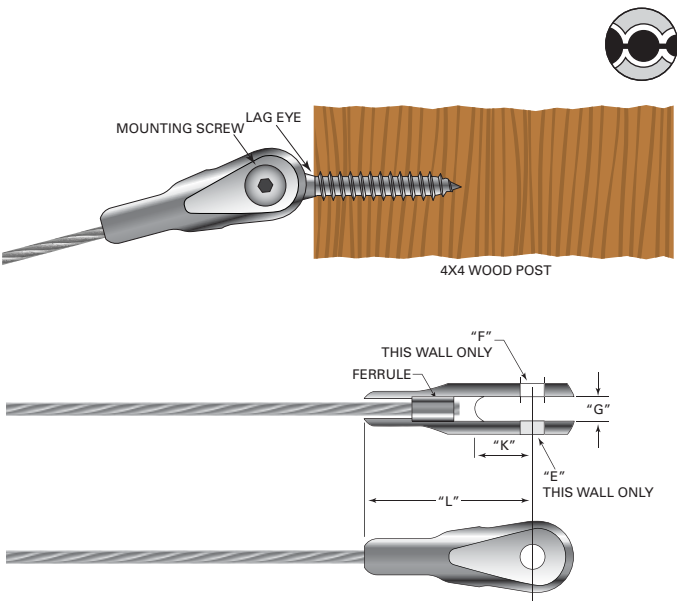

TYPE 316 STAINLESS STEEL

CABLE DIA.	PART NO.	USE WITH FERRULE NO.	USE WITH SCREW NO.	USE WITH LAG EYE NO.	"E" THREAD	"F" DIA.	"G"	"K"	"L"
1/8"	F-J62	F-4	SC-6	LE-6	1/4-28	.260"	.260"	.56"	1.75"
3/16"	F-J62	F-6	SC-6	LE-6	1/4-28	.260"	.260"	.56"	1.75"
1/4"	F-J82	F-8	SC-8	LE-8	3/8-24	.390"	.313"	.75"	2.12"
5/16"	F-J122	F-10	SC-8	LE-8	3/8-24	.390"	.348"	.87"	2.25"
3/8"	F-J122	F-12	SC-8	LE-8	3/8-24	.390"	.348"	.87"	2.25"

The Fixed Jaw is an exposed, swaged, non-tensioning, face-of-the-post-mounted fitting that is suitable for use on level or pitched runs and is available for 1/8", 3/16", 1/4", 5/16", and 3/8" diameter 1x19 stainless steel cable.

The Fixed Jaw must be used with a tensioning fitting on the opposite end of the run. This fitting attaches to the wood end post by installing a Lag Eye into a pre-drilled hole in the end post and attaching the Fixed Jaw to the **lag eye** with a button head **screw** (lag eye and screw information on page 9). The cable is retained within the Fixed Jaw by a ferrule swaged onto the end of the cable.

While this fitting can be used on pitched or level runs, it is most appropriate for pitched runs because the Fixed Jaw pivots at the lag eye. The pre-drilled hole for the lag eye is drilled level, making installation easy.

Use of this fitting requires an appropriately sized **ferrule** that is swaged onto the cable, which must also be purchased separately (see ferrule information on page 8).

This fitting was designed to be compatible in appearance to the Adjust-A-Jaw® tensioning fitting.