


Invisiware® Stud



Photo of stud before swaging.

The Invisiware® Stud is a concealed, swaged, non-tensioning, inside-the-post-mounting fitting that is suitable for use on level or pitched runs and is available for 1/8", 3/16", 1/4", 5/16", and 3/8" diameter 1x19 stainless steel cable.

The Invisiware® Stud can be used as a non-tensioning end in level or pitched applications. It is swaged onto one end of the cable and threaded into a drilled and tapped hole in the face of the post (1/4" wall thickness minimum). This fitting would typically be paired with an Invisiware® Receiver and Stud tensioning fitting on the opposite end. This method of using an Invisiware® Stud as a non-tensioning end is restricted to interior applications.

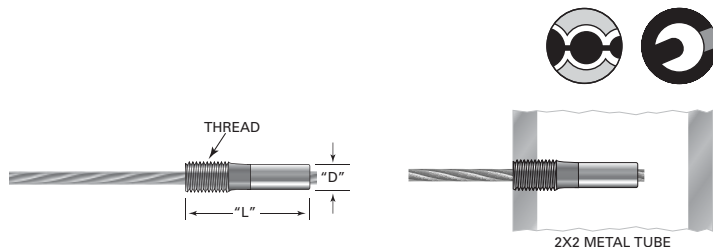

TYPE 316 STAINLESS STEEL — MOLY COATED

CABLE DIA.	PART NO.	THREAD	"L"	"D" DIAMETER AFTER SWAGED
1/8"	S-4	5/16-24	1.180"	.250"
3/16"	S-6	5/16-24	1.140"	.250"
1/4"	S-8	7/16-20	1.380"	.375"
5/16"	S-10	9/16-18	1.330"	.500"
3/8"	S-12	9/16-18	1.310"	.500"