



Push-Lock® Threaded Bolt



New for 2016 – the Push-Lock® Threaded Bolt fitting is an exposed, swageless, non-tensioning, face-of-the-post-mounted fitting that is suitable for use on level runs only, and is available for 1/8" and 3/16" diameter 1x19 stainless steel cable

The Push-Lock® Threaded Bolt must be used with a tensioning fitting on the opposite end of the run. This fitting is installed into a pre-drilled and tapped hole. This fitting is furnished with a Delrin® washer that is installed between the shoulder of the fitting and the end post to protect the surface of the finish of the end post as the fitting is installed. The cable attaches to the fitting via our Push-Lock® locking wedge system which requires no special tools.

This fitting is usually chosen one, because you want to use a swageless fitting AND you don't have access to the back side of the end post; and two, because you want to use a swageless fitting AND you want symmetry with a face mounted tensioner on the opposite end of the run.

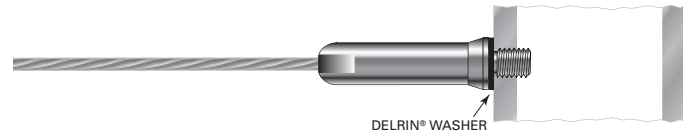

| CABLE DIA. | PART NO. |
|------------|------------|
| 1/8" | PL-FM-MS-4 |
| 3/16" | PL-FM-MS-6 |