
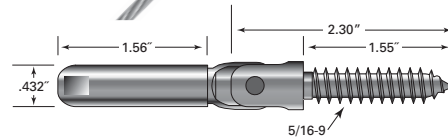


Push-Lock® with Lag Clevis

New for 2016 – the Push-Lock® with Lag Clevis is an exposed, swageless, non-tensioning, face-of-the-post-mounted fitting that is suitable for level or pitched runs, and is available for 1/8" and 3/16" diameter 1x19 stainless steel cable.

The Push-Lock® with Lag Clevis can be used with any tensioning fitting on the opposite end of the run. This fitting is installed into a pre-drilled hole in the wood end post. Drive the lag thread into the hole until the fitting shoulders on the post face. The cable attaches to the body via our Push-Lock® locking wedge system which requires no special tools.

While this fitting can be used on pitched or level runs, it is most appropriate for pitched runs because the body of the fitting pivots at the clevis. The pre-drilled hole for the lag eye is drilled level, making installation easy.

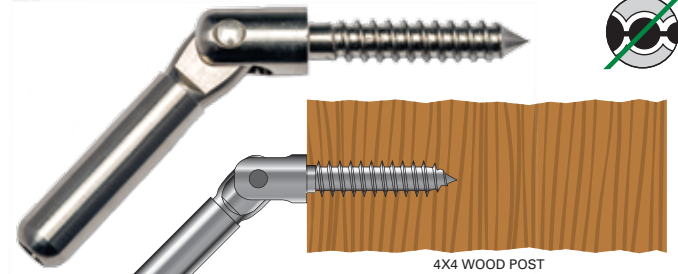

CABLE DIA.	PART NO.
1/8"	PL-LAG-CL-TE4-1
3/16"	PL-LAG-CL-TE6-1