


SWAGELESS TENSIONING FITTING Push-Lock® Turnbuckle Concrete Anchor Bolt



The Push-Lock® Turnbuckle with Anchor Bolt is an exposed, swageless, tensioning, face-of-the-surface-mounted fitting that is suitable for level runs terminating at a concrete surface only. This fitting is available for 1/8" and 3/16" diameter 1x19 stainless steel cable.

The Push-Lock® Turnbuckle with Anchor Bolt can be used with any fitting on the opposite end of the run. This fitting consists of five separate pieces, the concrete anchor, the anchor bolt, the body, the lock nut, and the Push-Lock® Stud. The concrete anchor (which is ordered separately from a building supply retailer) is driven into a pre-drilled hole in the concrete surface. The short thread of the anchor bolt portion of the fitting is threaded into the Concrete Anchor. The lock nut is installed all the way onto the exposed machine thread of the anchor bolt first, followed by the body. The Push-Lock® Stud threads into the body, and the cable attaches to the stud fitting via our Push-Lock® locking wedge system which requires no special

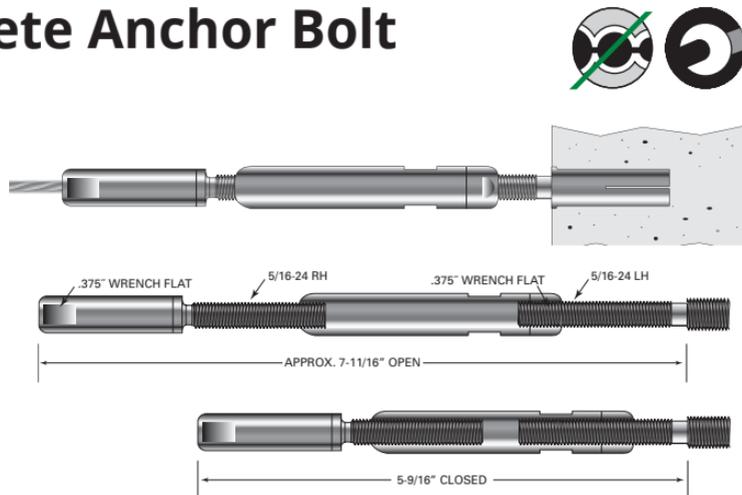

tools. Tension is created by using the body as a turnbuckle. Once sufficient tension is achieved, the lock nut is secured against the body to prevent the fitting from loosening.

CABLE DIA.	PART NO.
1/8"	PL-TB-AB-4
3/16"	PL-TB-AB-6